


Light Source Test Report

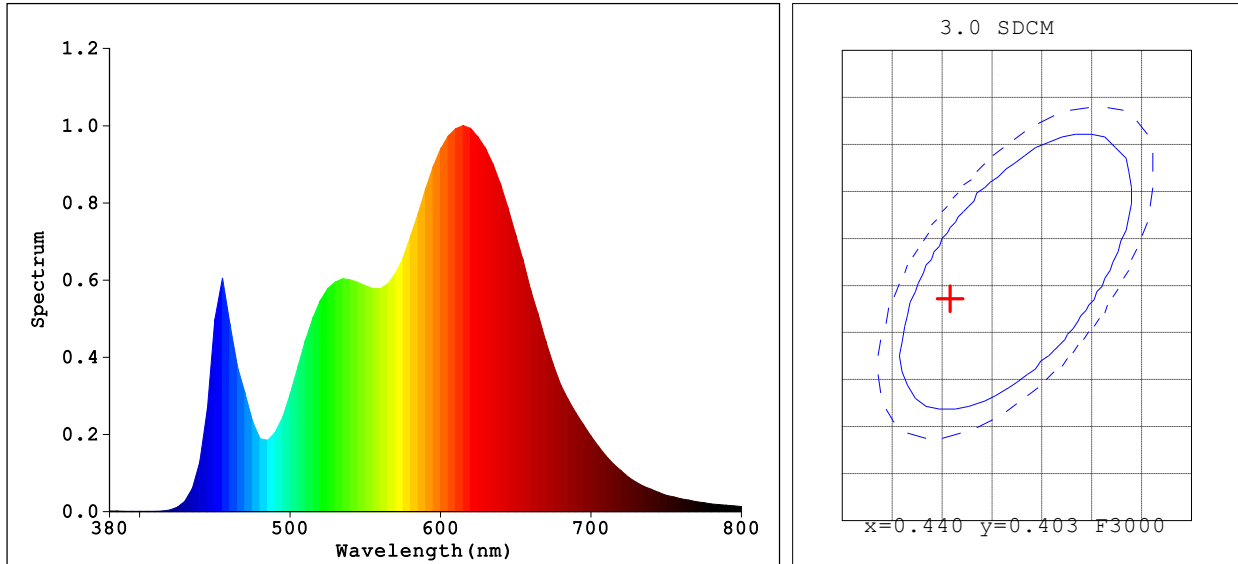

Color Parameters:

Chromaticity Coordinate: $x=0.4343$ $y=0.4007$ $u'=0.2503$ $v'=0.5197$
 Tc=3017K Dominant WL:Ld=583.1nm Purity=50.6% Centroid WL:595.0nm
 Ratio:R=26.6% G=70.9% B=2.4% Peak WL:Lp=615.0nm HWL:150.7nm
 Render Index:Ra=94.3
 R1 =97 R2 =98 R3 =98 R4 =97 R5 =96 R6 =96 R7 =91
 R8 =81 R9 =56 R10=94 R11=96 R12=78 R13=98 R14=97 R15=90

Photo Parameters:

Flux: 1066.0 lm Fe: 3.4680 W Efficacy:94.77 lm/W
 LEVEL:OUT WHITE:ANSI_3000K

Electrical Parameters:

Luminaire: U=24.00V I=0.4687A P=11.25W PF=1.000

Instrument Status:

Scan Range:380.0nm-800.0nm Interval:5.0nm[0] $I_p=20724$ (G=4,D=53)
 REF=37160 (R=3) %=-0.040% PMT: 28.0 centigrade [150.0]

Product Type:480-24V-3000K
 Number:N-03397
 Temperature:25.3 deg
 Test Operator:DAMIN
 Software:V2.00.100

Manufacturer:EVERFINE
 Test Department:ss
 Humidity:65.0%
 Test Date:2022-04-28 15:38:13
 Instrument:PMS-80_V1 (SN:1012042)